


LOCATION	MAIN ENTRY/BALCONY		SERVICE ENTRANCE / DINING AREA		CARPORT/SERVICE AREA		MASTER BR 1, MASTER BR 2, BEDROOM 1, BEDROOM 2		T&B, MASTER T&B, POWDER ROOM		2F MASTER BEDROOM		MP ROOM	
DESCRIPTION	DOUBLE-SWING, PANEL DOOR, NATURAL GRAIN STAINED FINISH, 6MM THK. REFLECTIVE GLASS TRANSOM WINDOW		DOUBLE SWING, PANEL DOOR, NATURAL GRAIN STAINED FINISH, 6MM THK. REFLECTIVE GLASS TRANSOM WINDOW		SINGLE-SWING PANEL DOOR, NATURAL GRAIN STAINED FINISH, 6MM THK. REFLECTIVE GLASS TRANSOM WINDOW		SINGLE SWING PANEL DOOR ON NATURAL OIL STAINED FINISH		SINGLE SWING, PVC FLUSH DOOR ON WOOD STAINED PATTERN FINISH		SLIDING GLASS DOOR, 6MM THK. REFLECTIVE GLASS ON ALUMINUM FRAME, POWDER COATED FINISH		WOODEN HOLLOW CORE SLIDING FLUSH DOOR, BROWN PAINT FINISH	
QUANTITY	1		2		3		6		7		1		1	

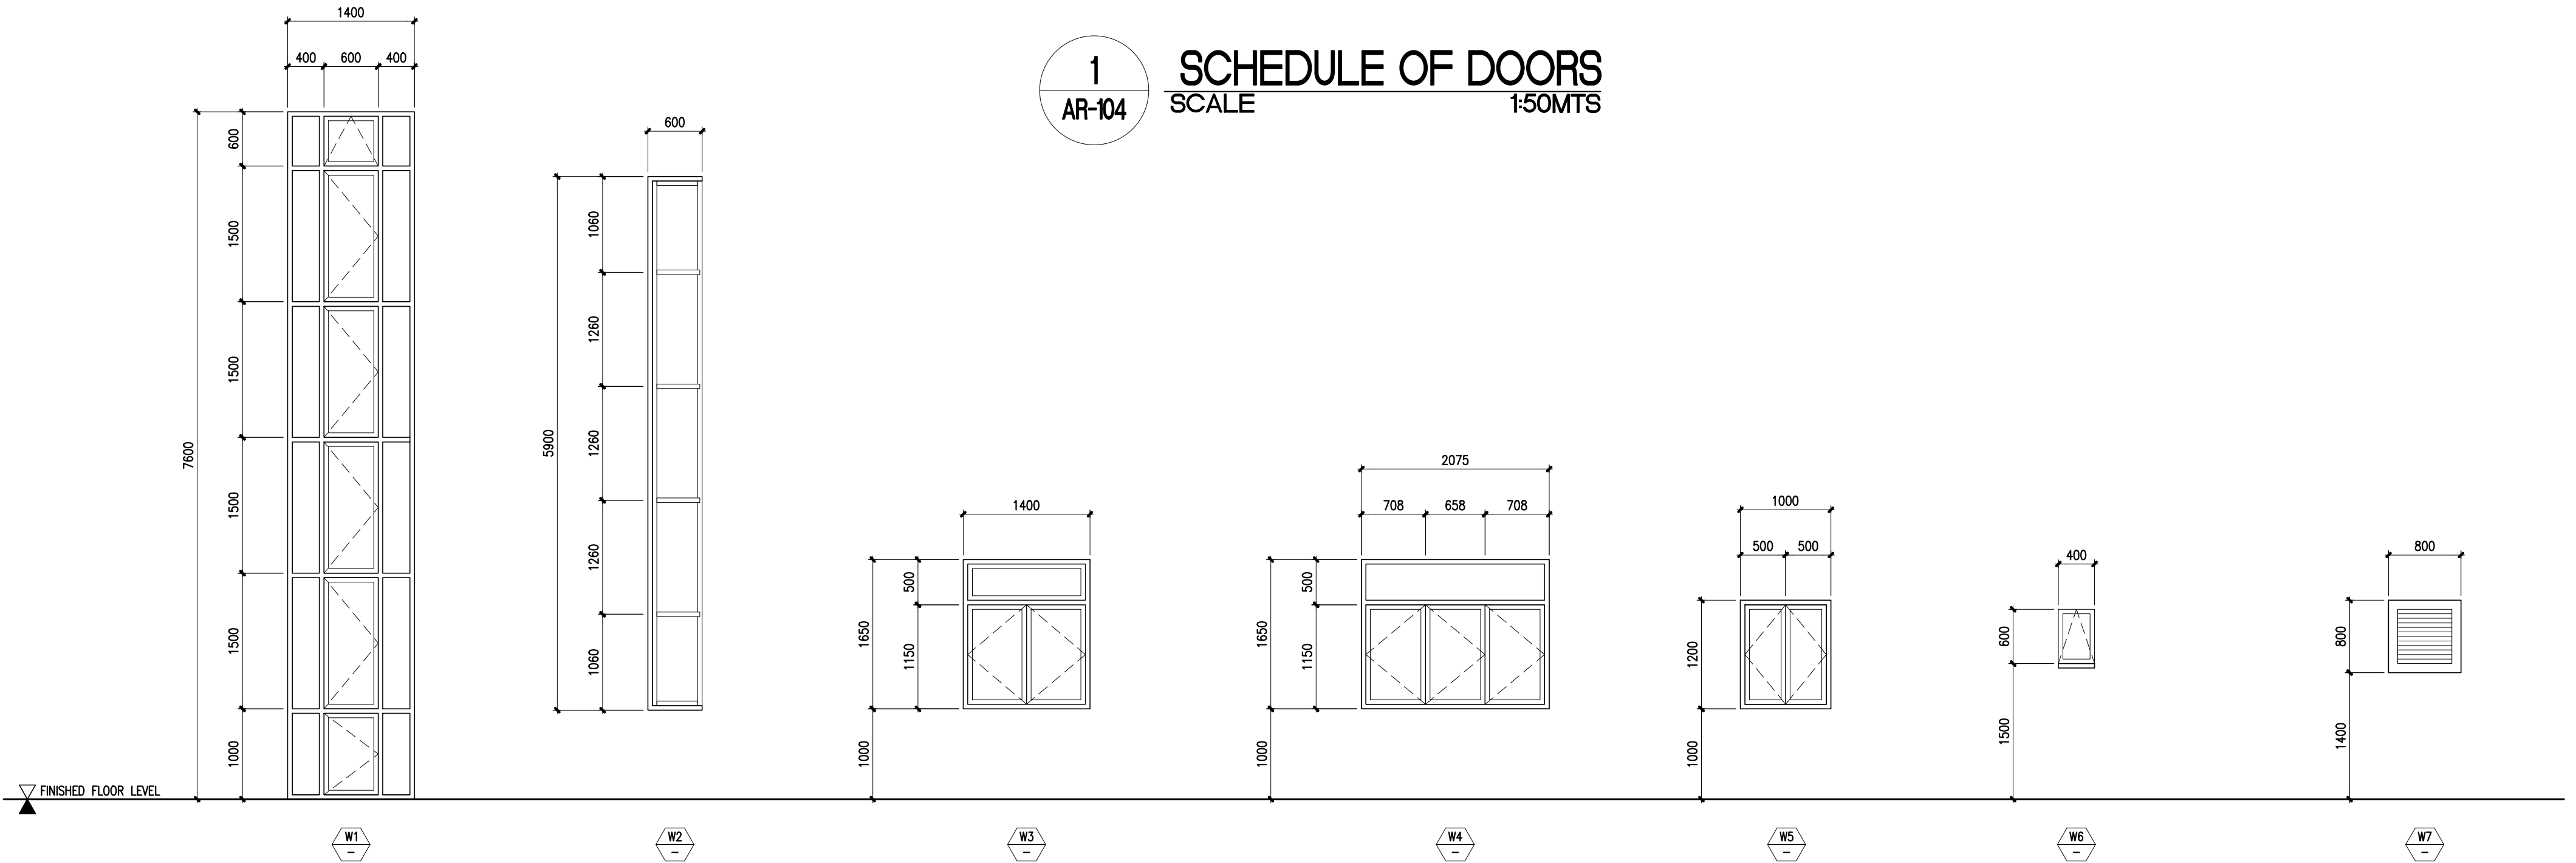

LOCATION	STAIRWELL		MP ROOM		DINING AREA / LIVING AREA / MASTER BEDROOM / BEDROOM 1 / STORAGE		KITCHEN		MASTER BEDROOM 1 AND 2		MASTER T&B / POWDER ROOM / MP ROOM / STORAGE		WATER PUMP ROOM	
DESCRIPTION	FIXED AND SWING GLASS WINDOWS, 6MM THK. REFLECTIVE GLASS ON ALUMINUM POWDER COATED FRAME FINISH		6MM THICK REFLECTED GLASS, FIXED CORNER WINDOW ON ALUMINUM POWDER COATED FRAME FINISH		CASEMENT WINDOW WITH 6MM THK. REFLECTIVE GLASS ON LAMINATED FINISH ALUMINUM FRAME		CASEMENT WINDOW WITH 6MM THK. REFLECTIVE GLASS ON LAMINATED FINISH ALUMINUM FRAME		SLIDING GLASS DOOR, 6MM THK. REFLECTIVE GLASS ON ALUMINUM FRAME, POWDER COATED FINISH		SINGLE-SWING PANEL DOOR, NATURAL GRAIN STAINED FINISH, 6MM THK. REFLECTIVE GLASS TRANSOM WINDOW		GA-16 FLAT BAR LOUVER VENTILLATION	
QUANTITY	1		1		9		3		2		9		1	

2

AR-104

SCHEDULE OF WINDOWS

SCALE

1:50MTS

LEGENDS

	CHB
	STEEL
	CONCRETE
	DOOR TAG
	WINDOW TAG
	CHANGE IN ELEVATION
	TILE STARTING POINT
	CHANGE IN FINISH
	BALLOON ASSIGNMENT
	FINISHED FLOOR LEVEL
	CEILING MOUNTED CENTER LIGHT
	DIRECTION PIN LIGHT
	PIN LIGHT
	CEILING MOUNTED CIRCULAR LIGHT
	SPECIAL LIGHT
	PENDANT LIGHT

REFERENCE SHEET

AR-101 - GENERAL NOTES, SPECIFICATIONS AND FINISHES
AR-102 - SITE DEVELOPMENT PLAN
AR-103 - PERSPECTIVES
AR-104 - FLOOR PLANS
AR-105 - ELEVATIONS
AR-106 - SECTIONS
AR-107 - SCHEDULE OF DOORS AND WINDOWS

NOTE:

ALL DIMENSIONS ARE IN MILLIMETER, LEVELS IN METERS UNLESS NOTED OTHERWISE

FOR BUILDING PERMIT